



# SP433

## Constant Voltage and Constant Current Controller

### DESCRIPTION

The SP433 is high-voltage four-terminal adjustable voltage references, with over current protection feature. The SP433 is a one chip solution to a 2.5V precision voltage reference and constant current output in the application of secondary feedback control of power supply, DC/DC converter, adaptor and charger. SP433 is idea for low cost switching power supply application.

### APPLICATIONS


- Battery Charger
- Battery Power Equipment
- Linear Regulators
- Switch Power Supply
- Cellular Phone
- Digital Cameras
- Computer Disk Drivers
- Instrumentation

### FEATURES


- Voltage Reference Accuracy of 0.5% & 1.0%
- Sink Current Capability from 1mA to 100mA
- Adjustable Output Voltage from VREF to 18V
- Low Output Noise
- Typical Output Dynamic Impedance Less Than 200mΩ
- Available in SOT-23-5L and TO-94 package
- Over Current Protection

### PIN CONFIGURATION

TO-94




SOT-23-5L



### PART MARKING

TO-94



Y : Year Code  
W : Week Code

SOT-23-5L






# SP433

## Constant Voltage and Constant Current Controller

### TYPICAL APPLICATION CIRCUIT

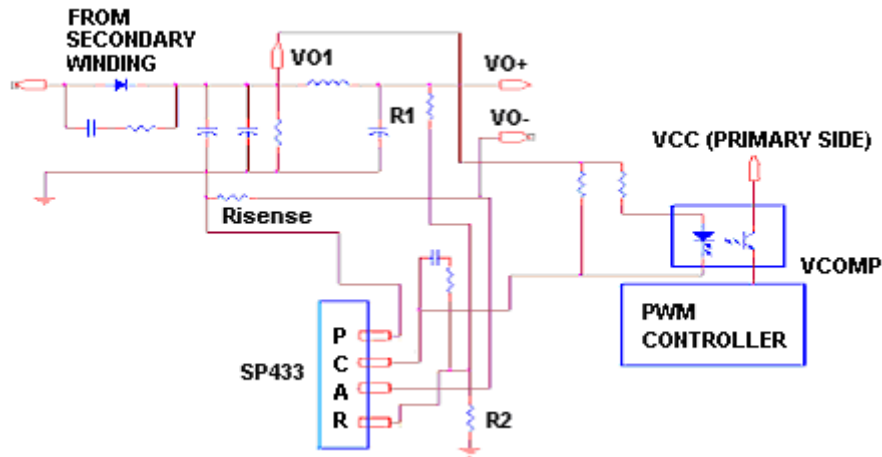

### PIN DESCRIPTION ( TO-94 )

Pin	Symbol	Description
1	R	REF
2	A	ANODE
3	C	CATHODE
4	P	CURRENT ENABLE

### PIN DESCRIPTION ( SOT-23-5L )

Pin	Symbol	Description
1	P	CURRENT ENABLE
2	NC	NC
3	ANODE	ANODE
4	REF	REF
5	CATHODE	CATHODE

### ORDERING INFORMATION

Part Number	Voltage Tolerance	Package	Part Marking
SP433AS25RGB	0.5%	SOT-23-5L	33A
SP433BS25RGB	1.0%	SOT-23-5L	33B
SP433AT94AGB	0.5%	TO-94	SP433
SP433BT94AGB	1.0%	TO-94	SP433


- ※ Week Code : A ~ Z ( 1 ~ 26 ) ; a ~ z ( 27 ~ 52 )
- ※ SP433AS25RGB : Tape Reel ; Pb – Free ; Halogen -Free
- ※ SP433BS25RGB : Tape Reel ; Pb – Free ; Halogen -Free
- ※ SP433AT94AGB : Tape Ammo ; Pb-Free ; Halogen -Free
- ※ SP433BT94AGB : Tape Ammo ; Pb-Free ; Halogen -Free



# SP433

## Constant Voltage and Constant Current Controller

### BLOCK DIAGRAM

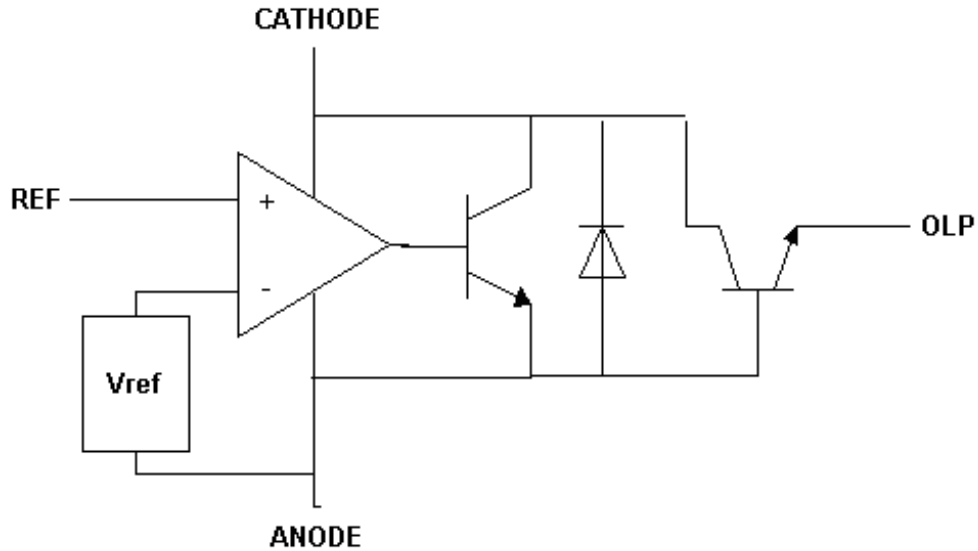

### ABSOLUTE MAXIMUM RATINGS

( $T_A=25^{\circ}\text{C}$  Unless otherwise specified)

Parameter	Symbol	Value	Unit
Cathode Voltage	$V_Z$	18	V
Continuous Cathode Current Range	$I_Z$	150	mA
Reference Current Range	$I_{REF}$	10	mA
Operating Junction Temperature Range	$T_J$	-40 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 ~ +150	$^{\circ}\text{C}$
Lead Temperature Range (Soldering 10Sec)	$T_{SOL}$	260	$^{\circ}\text{C}$
Thermal Resistance	$\Theta_{JA}$	140	$^{\circ}\text{C}/\text{W}$

The IC has a protection circuit against static electricity. Do not apply high static electricity or high voltage that exceeds the performance of the protection circuit to the IC.



# SP433

## Constant Voltage and Constant Current Controller

### ELECTRICAL CHARACTERISTICS

( $T_A=25^{\circ}\text{C}$  , Unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Reference Input Voltage ( $I_K=10\text{mA}$ , $V_Z=V_{REF}$ )	$V_{REF}$	SP433A SP433B	2.487 2.475	2.5 2.5	2.513 2.525	V
$V_{REF}$ Temp Deviation	$V_{DEV}$	$T_A=-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ $V_Z=V_{REF}$ $I_Z=10\text{mA}$		10	25	mV
Ratio Of Change In REF To Change In Cathode Voltage	$\frac{\Delta V_{REF}}{\Delta V_Z}$	$I_Z=10\text{mA}$ , $\Delta V_Z = 18\text{V} \sim V_{REF}$		-1.4	-2.7	mV/V
Reference Input Current	$I_{REF}$	$I_Z=10\text{mA}$ $R_1=10\text{K}\Omega$ $R_2=\infty$			1	$\mu\text{A}$
$I_{REF}$ Temp Deviation	$I_{REF(DEV)}$	$T_A=-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ $R_1=10\text{K}\Omega$ , $R_2=\infty$ $I_Z=10\text{mA}$			2.5	$\mu\text{A}$
Off-State Cathode Current	$I_{Z(OFF)}$	$V_{REF}=0\text{V}$ , $V_Z=18\text{V}$			0.1	$\mu\text{A}$
Dynamic Output Impedance	$R_Z$	$f < 1\text{kHz}$ , $V_Z=V_{REF}$ $I_Z=1\text{mA} \sim 100\text{mA}$		1.0	1.5	$\Omega$
Minimum Operating Current	$I_{Z(MIN)}$	$V_Z=V_{REF}$			1.0	mA
Current Amplification	$I_{amp}$	$V_C=1\text{V}$ , $I_A=50\mu\text{A}$	10			mA
Saturation Voltage	$V_{sat}$	$I_C=150\text{mA}$ , $I_A=10\text{mA}$			0.8	V
Maximum Protection Current	$I_P$				100	mA



# SP433

## Constant Voltage and Constant Current Controller

### APPLICATION NOTE

In the above application, SP433 is used to provide an accurate control of voltage and current. The voltage loop is controlled through an internal error amplifier, the resistor bridge R1, R2 and the photo-coupler. The relation between V<sub>out</sub>, R1, R2 and V<sub>ref</sub> is shown in:

$$V_{out} = V_{ref} \times (1 + R1/R2)$$

The current loop is controlled through an internal transistor, the sense resistor and the photo-coupler. The control equation is:

$$R_{isense} \times I_{limit} = 0.7V \text{ (typical)}$$

Where I<sub>limit</sub> is the desired current limit. The selection of R<sub>isense</sub> should consider the power loss through R<sub>isense</sub>. It is calculated as:

$$P_{limit} = 0.7 \times I_{limit}$$







Whether AC input is at High Line or Low Line, SP433 can provide the same current protection. It has the fuse function at the output.



# SP433

## Constant Voltage and Constant Current Controller

### PERFORMANCE CHARACTERISTICS

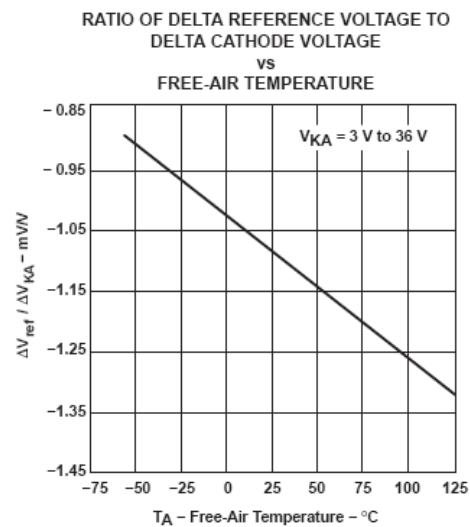
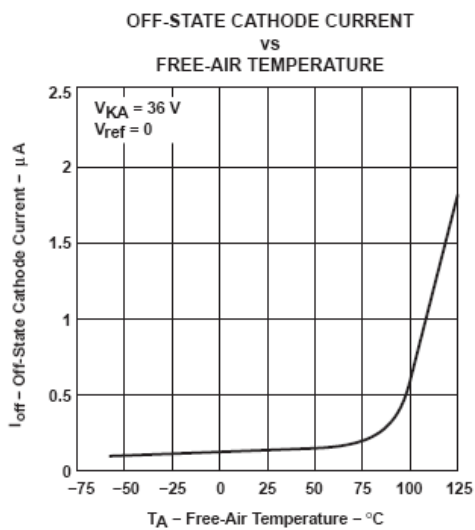
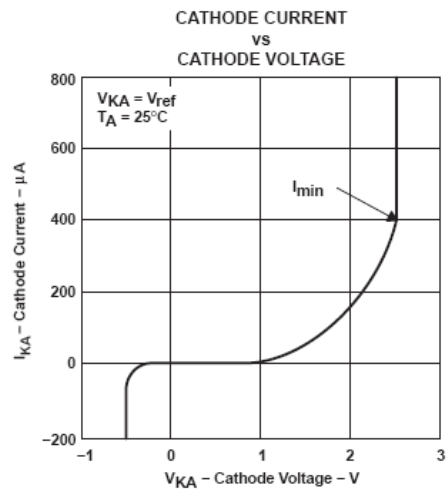
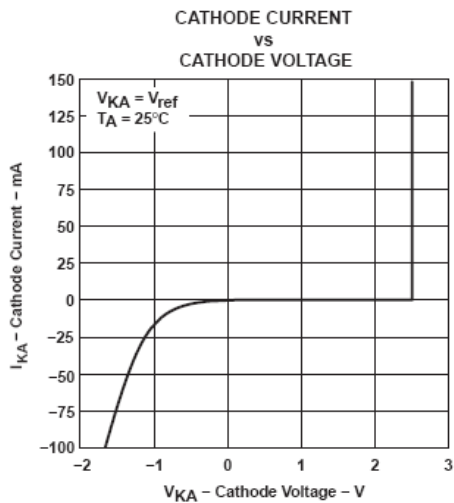
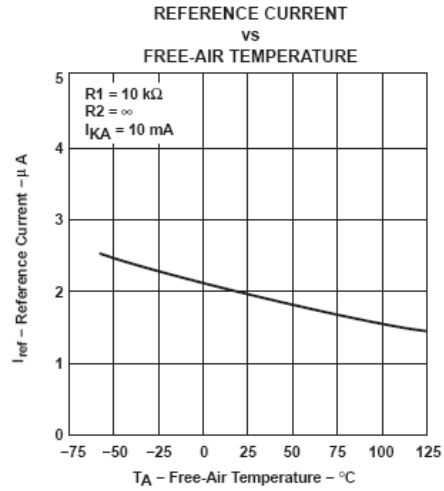
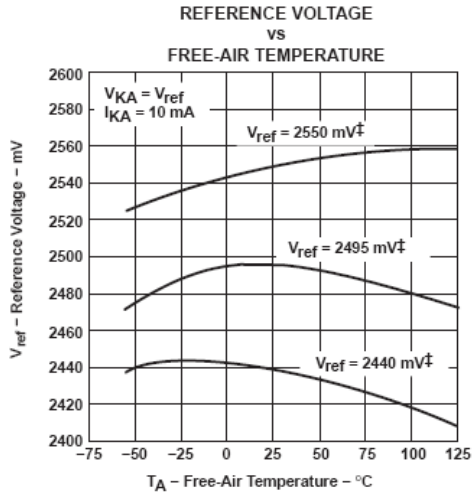




# SP433

## Constant Voltage and Constant Current Controller

### PERFORMANCE CHARACTERISTICS

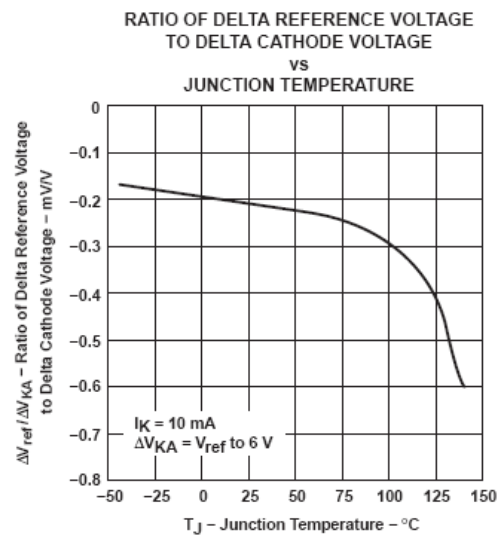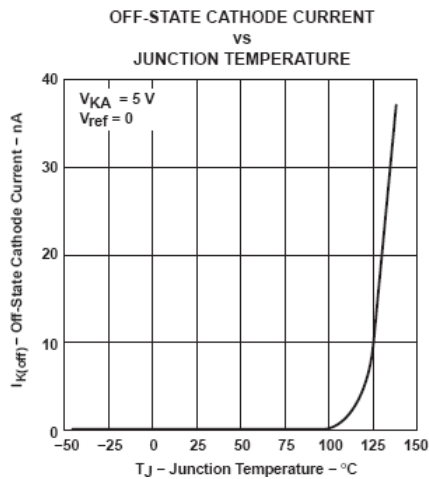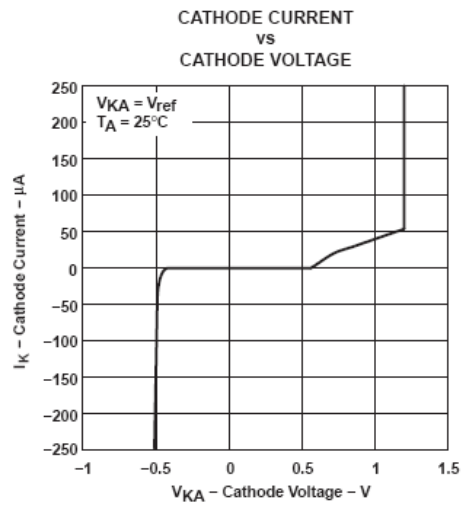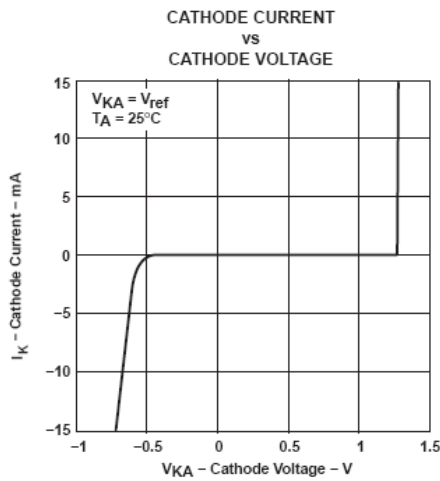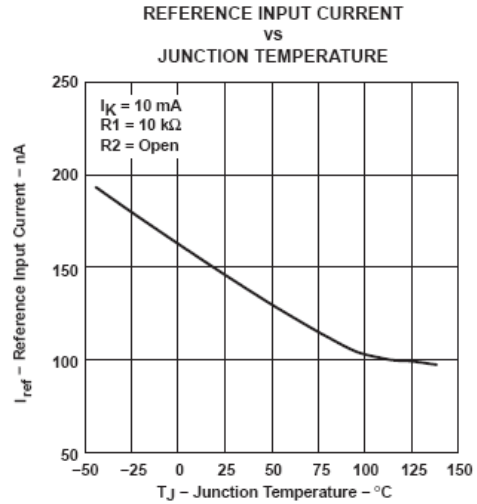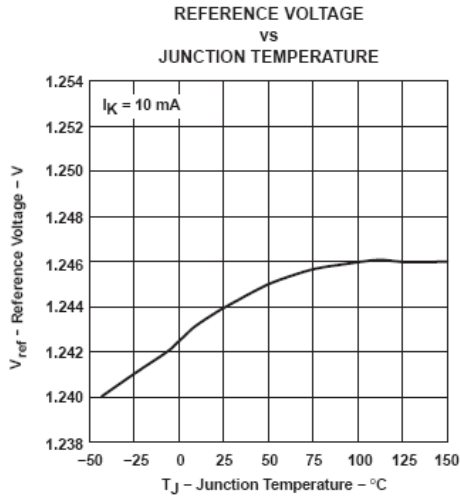



# SP433

## Constant Voltage and Constant Current Controller

---

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2020 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan 115

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

© <http://www.syncpower.com>