



SP6879

Quasi-Resonant PWM Controller

DESCRIPTION

The SP6879 is a low cost, Quasi-Resonant (QR) PWM controller intended for flyback topologies. The internal valley detector ensures the converter operates at quasi-resonant operation over wide range of line voltage. IC operates in fixed frequency mode for some particular conditions . The build-in advanced energy saving function would provide the users a superior AC/DC power application of higher efficiency, and lower cost solution for applications. The rich set of protection features such as VCC Under Voltage Lockout (UVLO), VCC Over Voltage Protection (VCC OVP) and clamp, load Over Voltage Protection (OVP), Over Load Protection (OLP) and on-chip Over Temperature Protection (OTP), Brown Out/In helps to realize low component counts and high performance power supply. SP6879 is available in SOP-8/ DIP-8P packages.

APPLICATIONS


- AC/DC Switching Power Adaptor
- Set-top Box Power Supply
- Open-Frame Switching Power Supply

FEATURES

- High-Voltage BCD Process
- Under Voltage Lockout (UVLO)
- Quasi-Resonant Control
- Internal 4ms Soft Start
- Brown Out/Brown In and line OVP protection
- OLP (Over Load Protection)
- OVP (Over Voltage Protection) on Vcc Pin
- 100KHz Maximum Frequency
- 800mA Driving Capability


PIN CONFIGURATION

SOP-8/DIP-8



PART MARKING

SOP-8/DIP-8P

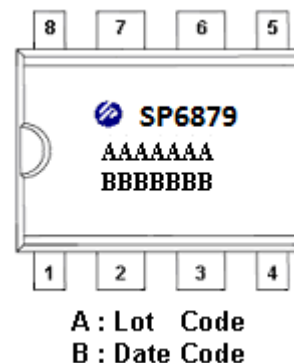




SP6879

Quasi-Resonant PWM Controller

TYPICAL APPLICATION CIRCUIT FOR HIGH EFFICIENCY SMPS

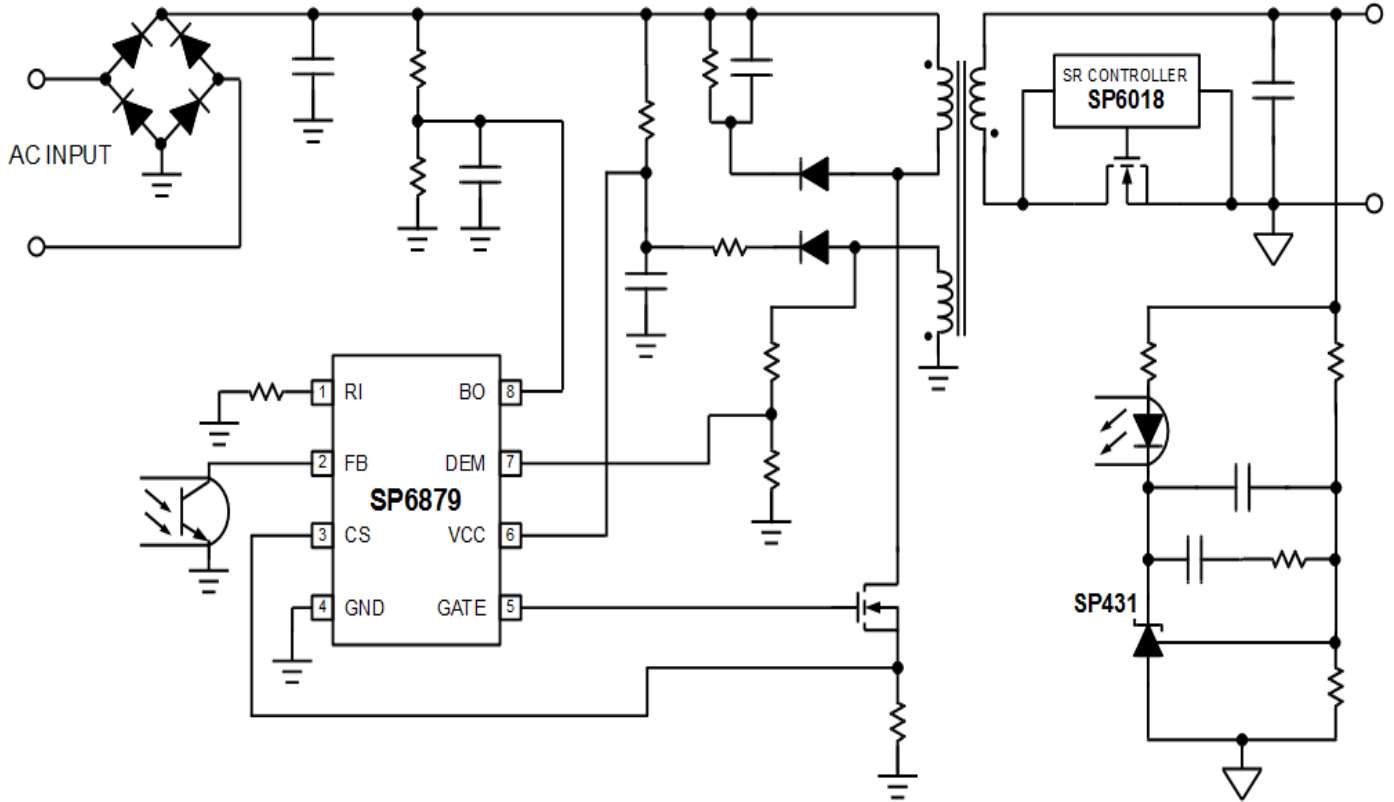

PIN DESCRIPTION


Pin	Symbol	Description
1	RI	Set the internal frequency and timer.
2	FB	Voltage feedback. It provides feedback to the internal PWM comparator to control the duty cycle.
3	CS	Current sense.
4	GND	Ground
5	GATE	Gate driver output to drive the external MOSFET.
6	Vcc	Supply voltage for the IC
7	DEM	Core reset detection and OVP.
8	BO	Brown Out and Line OVP .



SP6879

Quasi-Resonant PWM Controller

BLOCK DIAGRAM

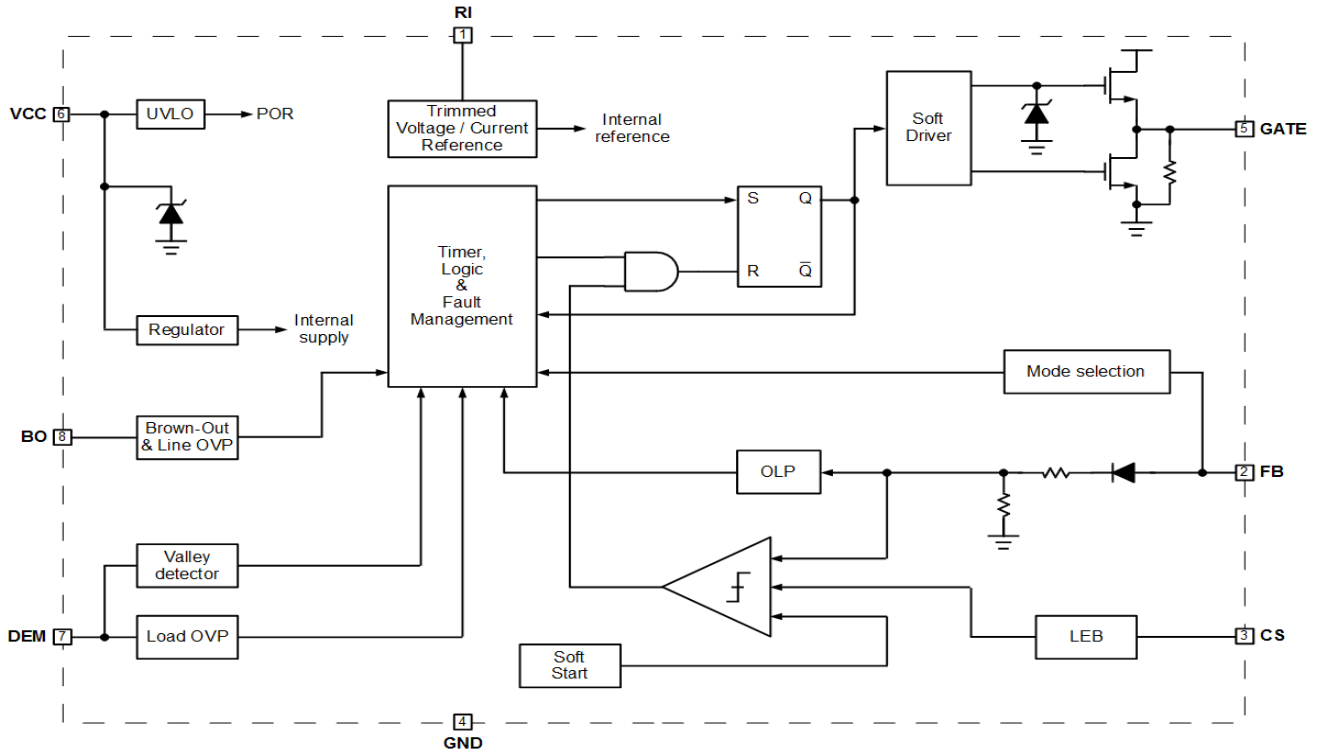

ORDERING INFORMATION

Part Number	Package	Part Marking
SP6879D8TGB	DIP-8	SP6879
SP6879S8RGB	SOP-8	SP6879

※ SP6879D8TG : Tube ; Pb – Free ; Halogen-Free

※ SP6879S8RGB : Tape Reel ; Pb – Free ; Halogen-Free

ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified.)

The following ratings designate persistent limits beyond which damage to the device may occur.

Symbol	Parameter	Value	Unit
V _{CC}	DC Supply Voltage	26	V
V _{RI/FB/CS/DEM/BO}	RI /FB /CS/DEM/BO Voltage	-0.3 ~ 7.0	V
ESD	Human Body Model	4	KV
	Machine Model	300	V
T _{ope}	Operating Ambient Temperature	-40 ~ 85	°C
T _J	Operating Junction Temperature Range	-40 ~ 150	°C
T _{STG}	Storage Temperature Range	-40 ~ 150	°C
T _{LEAD}	Pb-Free Lead Soldering Temperature for 5 sec.	260	°C
R _{θJC}	Thermal Resistance Junction – Case (*)	SOP-8	150
		DIP-8	90

(*) The power dissipation and thermal resistance are evaluated under copper board mounted with free air conditions.



SP6879

Quasi-Resonant PWM Controller

ELECTRICAL CHARACTERISTICS

($T_A=25^{\circ}\text{C}$, $V_{CC}=16\text{V}$, $R_{RI} = 20\text{K Ohm}$ unless otherwise specified.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage (Vcc Pin)						
Ist _{up}	Startup Current	$V_{CC}=\text{UVLO}-1.5\text{V}$		5	15	uA
I _{cc} (op)	Operating Current	$V_{FB} = 3\text{V}$		2.0	4.0	mA
		$V_{FB} = 3\text{V}, C_L = 1\text{nf}$		3.0	5.0	mA
UVLO (off)	Min. Operating Voltage			7.5		V
UVLO (on)	Start Threshold Voltage			13.5		V
OVP Level	Over Voltage Protection			24		V
V _{cc} Clamp	Clamping Voltage	$I_{VCC} = 10\text{mA}$		26		V
Voltage Feedback (FB Pin)						
I _{sc}	Short Circuit Current			0.3		mA
V _{op}	Open Loop Voltage			5.3		V
V _{TH_BM_on}	Burst Mode on threshold			0.8		V
V _{TH_BM_off}	Burst Mode off threshold			0.7		V
Z _{FB}	Input Impedance			17		K Ω
V _{TLOLP}	OLP Trip Level			4.4		V
T _{DOLP}	OLP Delay Time (note)			80		mS
Demagnetization (DEM Pin)						
V _{TH(DEM)}	Demagnetization Threshold Voltage			75		mV
V _{DEM(H)}	Input Clamp Voltage High			6		V
V _{DEM(L)}	Input Clamp Voltage Low			-0.7		V
T _{supp}	Suppression of the transformer ringing at start of secondary stroke			2.5		uS
T _{DEM}	Demagnetization Propagation Delay			250		nS
V _{DEM(OVP)}	Load OVP trigger point			3.75		V
T _{DEL}	Number of Cycles to trigger OVP			4		Cycle
Current Sensing (CS Pin)						
V _{CS(L)}	CS threshold at Zero Duty Cycle	Zero duty cycle, $V_{FB}=3\text{V}$	0.415	0.45	0.485	V
V _{CS(H)}	CS threshold at max Duty Cycle	Max duty cycle, $V_{FB}=3\text{V}$		0.8		V
V _{CS(BM)}	Burst mode CS threshold	Zero Output, $V_{FB}=1\text{V}$		0.3		V
T _{LEB}	Leading Edge Blanking Time			100		nS
Gate Driver Output (GATE Pin)						
V _{OL}	Output Low Level	$V_{CC}=15\text{V}, I_o=100\text{mA}$			1	V
V _{OH}	Output High Level	$V_{CC}=15\text{V}, I_o=100\text{mA}$	7.5			V
V _{OC}	Output Clamp Voltage Level	$V_{CC}=18\text{V}$		16.5		V
T _r	Rising Time	$C_L = 1\text{nf}$		80		nS
T _f	Falling Time	$C_L = 1\text{nf}$		30		nS
Frequency Setup (RI Pin)						
RI	Resistor Range			20		K Ω
V _{RI_open}	RI open voltage			2.0		V
F _{burst}	Burst mode switching frequency			22		KHz
F _{QR(L)}	Frequency low clamp in QR mode		47	52	57	KHz
F _{QR(H)}	Frequency high clamp in QR mode		82	90	98	KHz
G_PFM	PFM mode frequency modulation slope			90		KHz/V
$\Delta F(\text{shuffle})/F$	Frequency Shuffling Range		-4		+4	%
T _{ON}	Maximum ON Time	$R_{RI} = 20\text{K}\Omega$	10	13	15	uS
T _{OFF}	Maximum OFF Time	$R_{RI} = 20\text{K}\Omega$	40	55	75	uS



SP6879

Quasi-Resonant PWM Controller

Brown Out and Line OVP Section (BO Pin)

VBO(ovp)	Line OVP Threshold Voltage			2		V
VBO(TH)	Brown Out Threshold Voltage			0.5		V
TDEL(BO)	Brown Out Debounce Time			50		mS
IBD(HYS)	Output curret for hysteresis setup			2		uA

Soft Start

T_soft	Internal Soft Startup Time			4		mS
--------	----------------------------	--	--	---	--	----


Note: The OLP delay time is proportional to the period of switching cycle. So that, the lower RI resistor value will set the higher switching frequency and the shorter OLP delay time.



SP6879

Quasi-Resonant PWM Controller

DIP- 8P PACKAGE OUTLINE

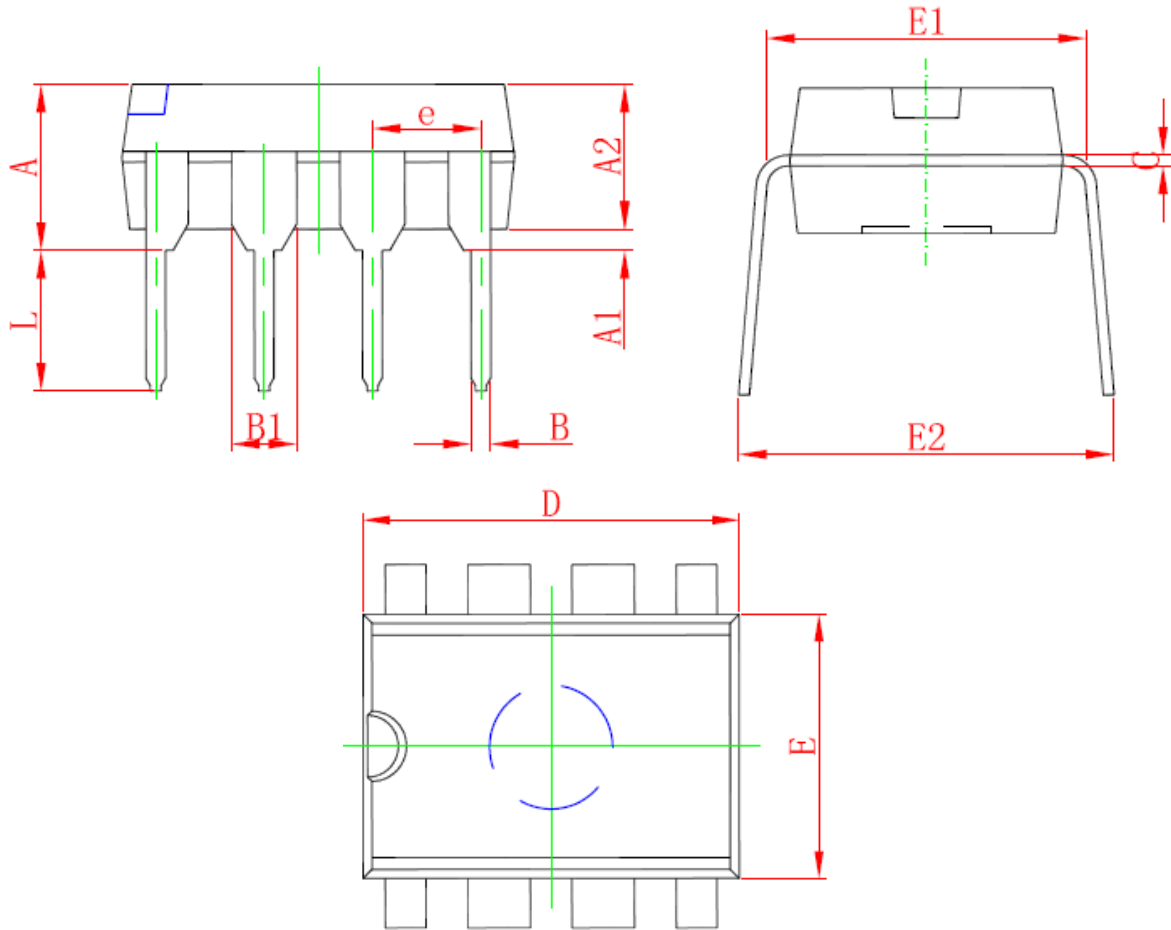





Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.710	4.310	0.146	0.170
A1	0.510		0.020	
A2	3.200	3.600	0.126	0.142
B	0.380	0.570	0.015	0.022
B1	1.524 (BSC)		0.060 (BSC)	
C	0.204	0.360	0.008	0.014
D	9.000	9.400	0.354	0.370
E	6.200	6.600	0.244	0.260
E1	7.320	7.920	0.288	0.312
e	2.540 (BSC)		0.100 (BSC)	
L	3.000	3.600	0.118	0.142
E2	8.400	9.000	0.331	0.354



SP6879

Quasi-Resonant PWM Controller

SOP-8 PACKAGE OUTLINE

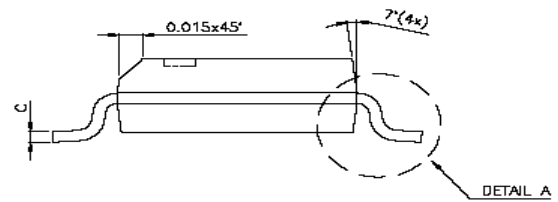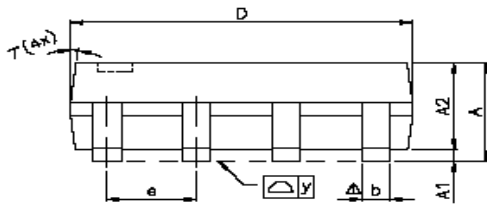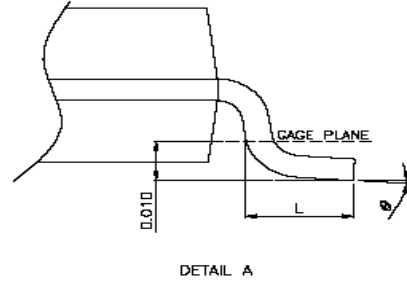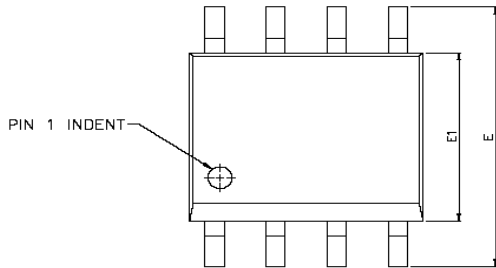

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.47	1.60	1.73	0.058	0.063	0.068
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.33	0.41	0.51	0.013	0.016	0.020
C	0.19	0.20	0.25	0.0075	0.008	0.0098
D	4.80	4.85	4.95	0.189	0.191	0.195
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e	—	1.27	—	—	0.050	—
L	0.38	0.71	1.27	0.015	0.028	0.050
Δy	—	—	0.076	—	—	0.003
θ	0°	—	8°	0°	—	8°



SP6879

Quasi-Resonant PWM Controller

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties that may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2014 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

<http://www.syncpower.com>