



SPN1032

N-Channel Enhancement Mode MOSFET

DESCRIPTION

The SPN1032 is the N-Channel enhancement mode power field effect transistors are produced using high cell density , DMOS trench technology. This high density process is especially tailored to minimize on-state resistance and provide superior switching performance. These devices are particularly suited for low voltage applications such as notebook computer power management and other battery powered circuits where high-side switching , low in-line power loss, and resistance to transients are needed.



FEATURES

- N-Channel
30V/0.95A, $R_{DS(ON)}=550m\Omega@V_{GS}=4.5V$
30V/0.75A, $R_{DS(ON)}=650m\Omega@V_{GS}=2.5V$
30V/0.65A, $R_{DS(ON)}=850m\Omega@V_{GS}=1.8V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOT-523 (SC-89-3L) package design


APPLICATIONS

- Drivers : Relays/Solenoids/Lamps/Hammers
- Power Supply Converter Circuits
- Load/Power Switching Cell Phones, Pagers

PIN CONFIGURATION(SOT-523 / SC-89-3L)



PART MARKING



Y : year
W: week



SPN1032

N-Channel Enhancement Mode MOSFET

PIN DESCRIPTION

Pin	Symbol	Description
1	G	Gate
2	S	Source
3	D	Drain

ORDERING INFORMATION

Part Number	Package	Part Marking
SPN1032S52RG	SOT-523	B2
SPN1032S52RGB	SOT-523	B2

- ※ SPN1032S52RG : Tape Reel ; Pb – Free
- ※ SPN1032S52RGB : Tape Reel ; Pb – Free, Halogen – Free

ABSOLUTE MAXIMUM RATINGS

(TA=25 °C Unless otherwise noted)

Parameter	Symbol	Typical	Unit	
Drain-Source Voltage	V _{DSS}	30	V	
Gate –Source Voltage	V _{GSS}	±12	V	
Continuous Drain Current(T _J =150 °C)	I _D	TA=25 °C	0.65	A
		TA=80 °C	0.45	
Pulsed Drain Current (*)	I _{DM}	0.95	A	
Thermal Resistance-Junction to Ambient	R _{θJA}	375	°C/W	
Power Dissipation	P _D	1.35	W	
Operating Junction Temperature	T _J	-55/150	°C	
Storage Temperature Range	T _{STG}	-55/150	°C	

(*) Pulse width limited by safe operating area



SPN1032

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS

(TA=25°C Unless otherwise noted)





Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	30			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	0.35		1.0	
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 30	μA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=48V, V_{GS}=0V$ $T_J=25^\circ C$			30	μA
		$V_{DS}=48V, V_{GS}=0V$ $T_J=55^\circ C$			100	
On-State Drain Current	$I_{D(on)}$	$V_{DS} \geq 4.5V, V_{GS}=5V$	0.7			A
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=0.95A$		0.45	0.55	Ω
		$V_{GS}=2.5V, I_D=0.75A$		0.50	0.65	
		$V_{GS}=1.8V, I_D=0.65A$		0.70	0.85	
Forward Transconductance	g_{fs}	$V_{DS}=10V, I_D=0.4A$		1.0		S
Diode Forward Voltage	V_{SD}	$I_S=0.15A, V_{GS}=0V$		0.8	1.2	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=10V, V_{GS}=4.5V,$ $I_D=0.6A$		1.2	1.5	nC
Gate-Source Charge	Q_{gs}			0.2		
Gate-Drain Charge	Q_{gd}			0.3		
Input Capacitance	C_{iss}	$V_{DS}=10V, f=1MHz,$ $V_{GS}=0V$		7.2		pF
Output Capacitance	C_{oss}			17		
Reverse Transfer Capacitance	C_{rss}			1.6		
Turn-On Time	$t_{d(on)}$	$V_{DD}=10V, R_L=10\Omega,$ $I_D=0.5A$ $V_{GEN}=4.5V, R_G=6\Omega$		5	10	ns
	t_r			8	15	
Turn-Off Time	$t_{d(off)}$			10	18	
	t_f			1.2	2.8	



SPN1032

N-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

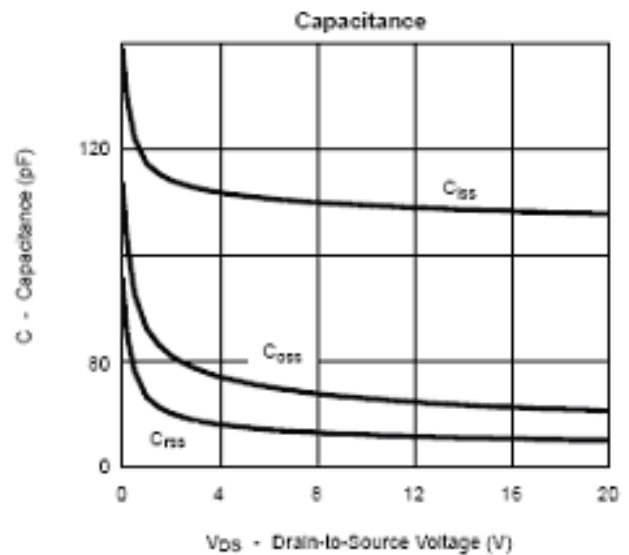
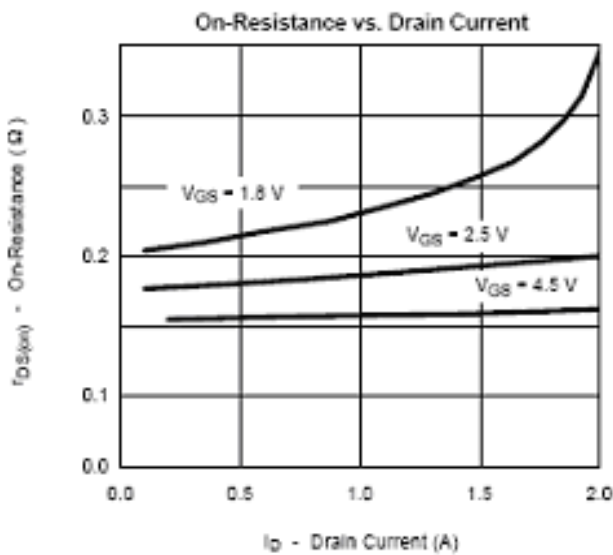
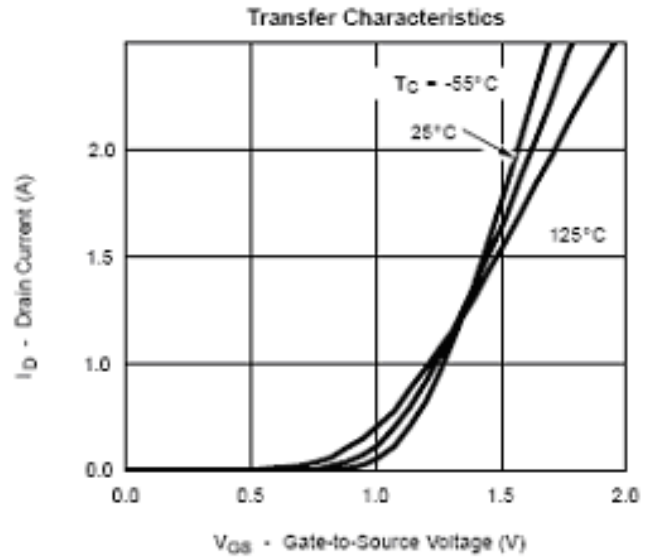
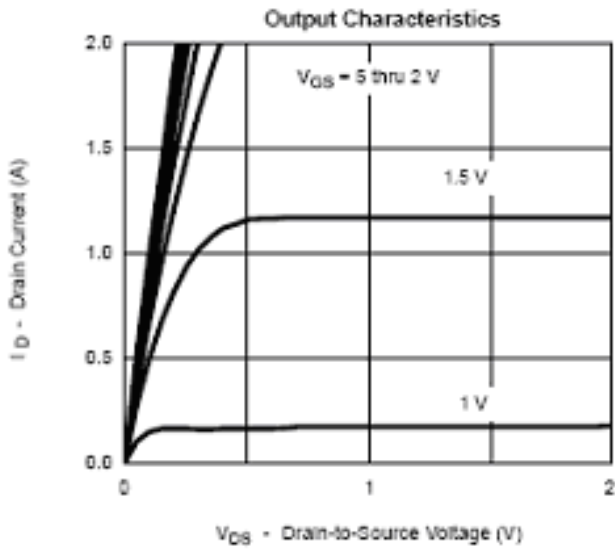




SPN1032

N-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

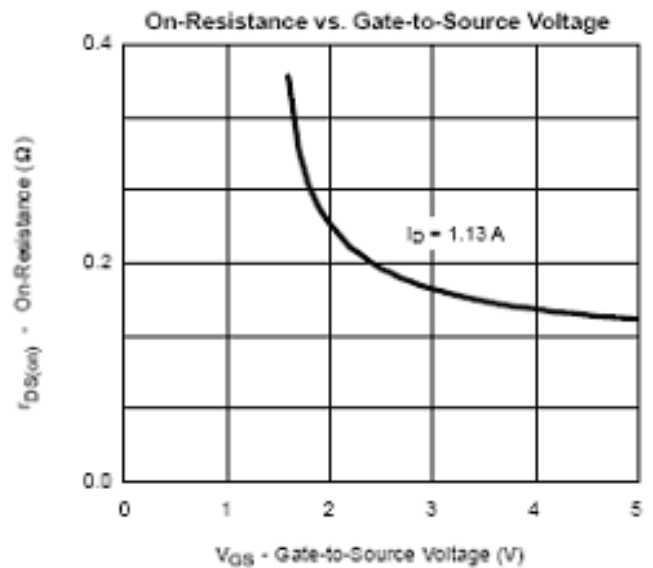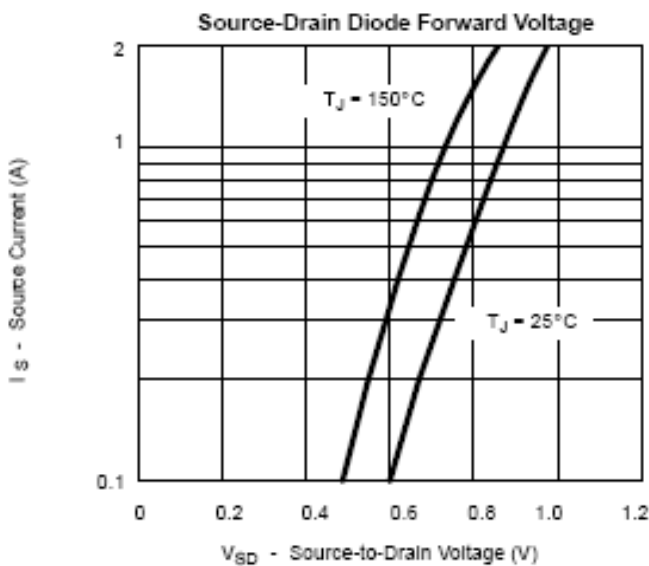
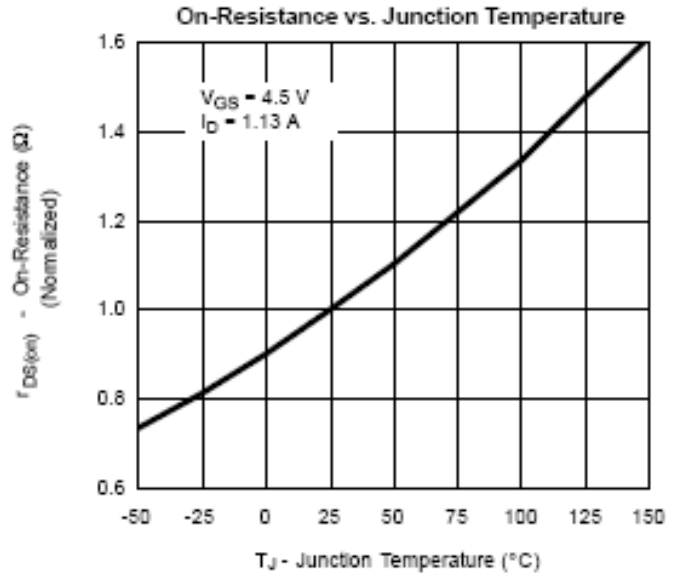
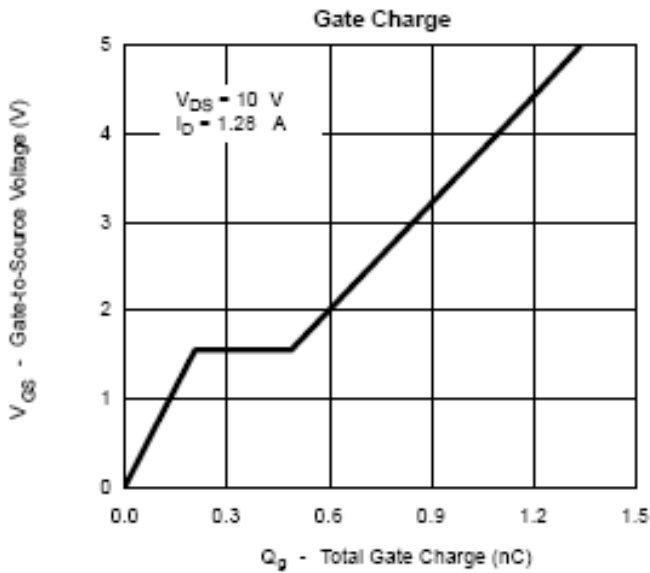




SPN1032

N-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

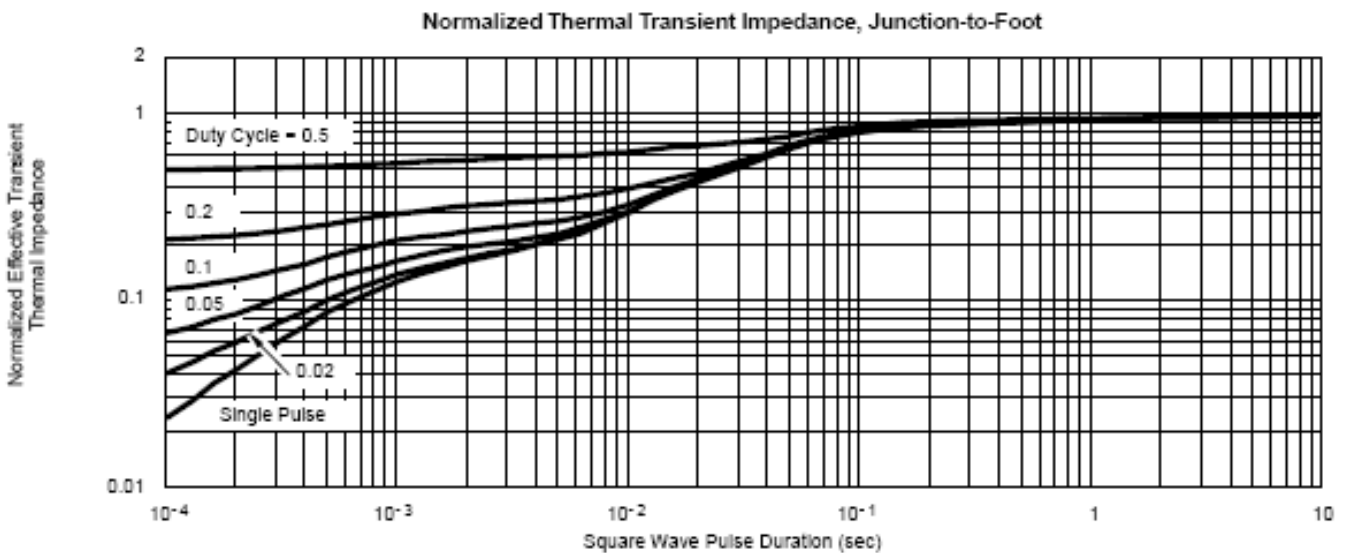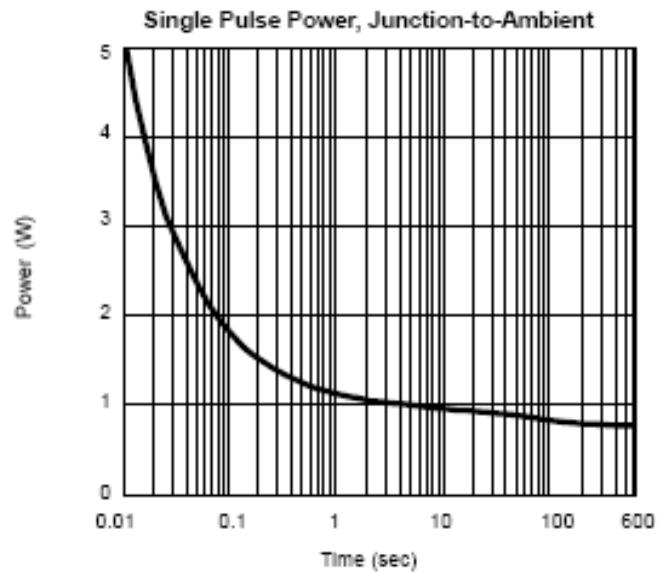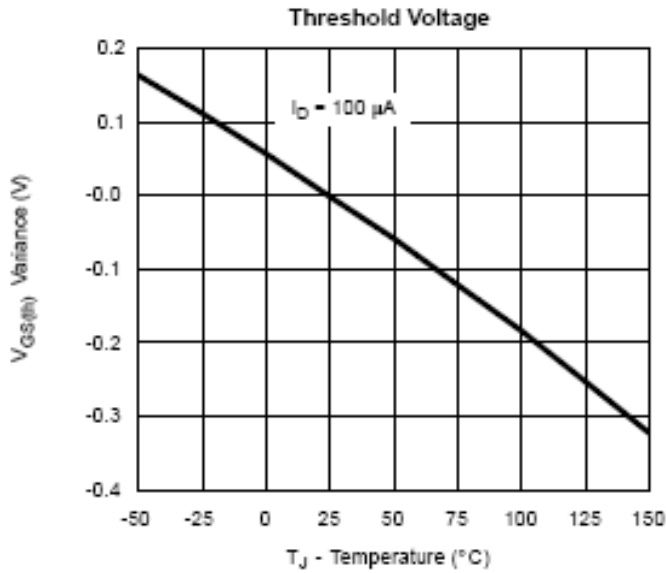




SPN1032

N-Channel Enhancement Mode MOSFET

SOT-523 PACKAGE OUTLINE

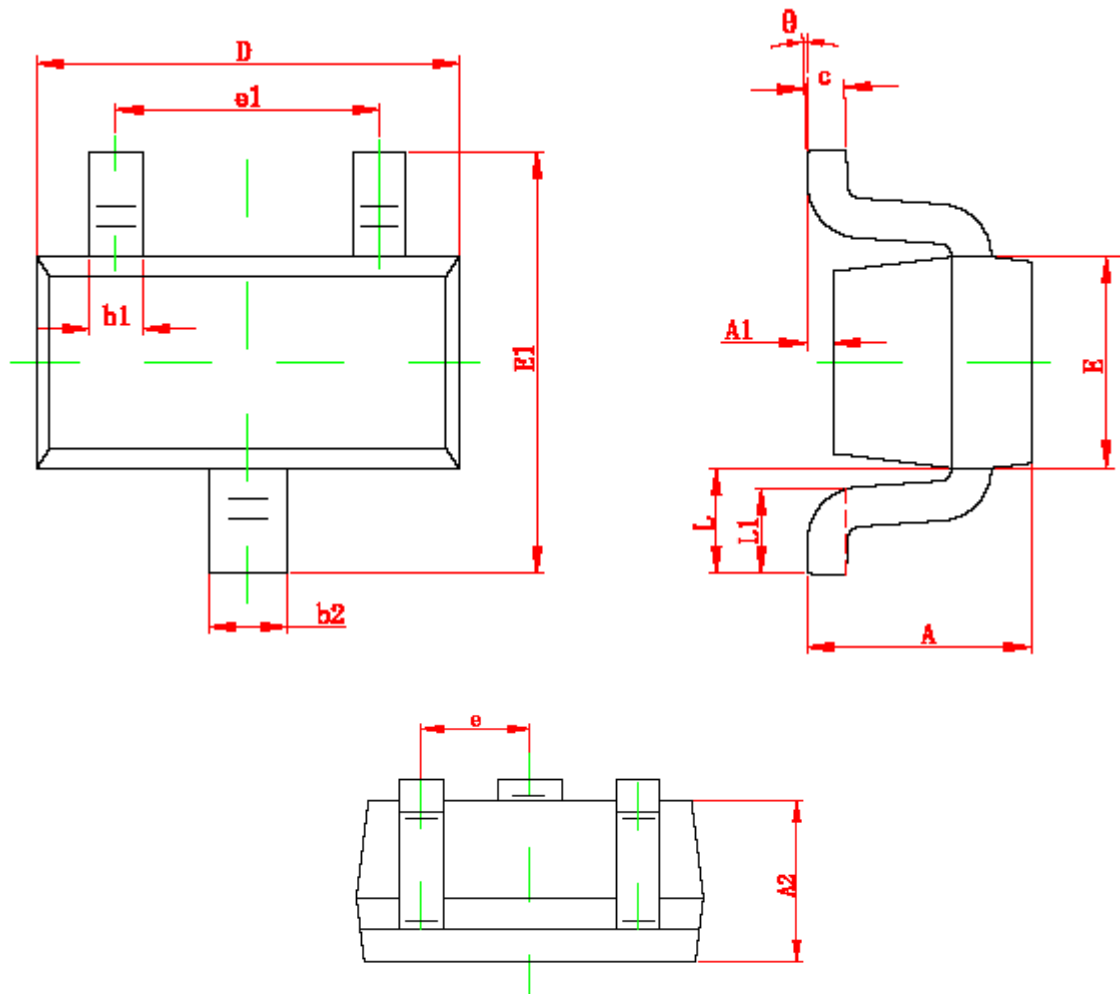

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.325	0.010	0.013
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.750	0.850	0.030	0.033
E1	1.450	1.750	0.057	0.069
e	0.500 TYP		0.020 TYP	
e1	0.900	1.100	0.035	0.043
L	0.550 REF		0.022 REF	
L1	0.280	0.440	0.011	0.017
theta	0°	4°	0°	4°



SPN1032

N-Channel Enhancement Mode MOSFET

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2015 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan 115

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

© <http://www.syncpower.com>